






REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
1			INITIAL RELEASE	2019.10.21	Alex_Z

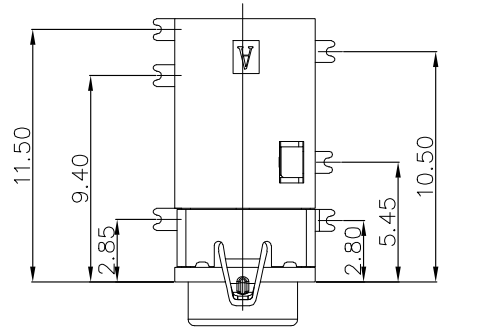


- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 1000Ω MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;

5706B4-047R*000R-**



T: TRAY
R: REEL
0: BLACK
PLATING:
1: G/F 2: Au 5u"
R: RoHS
H: HALOGEN-FREE
AUDIO JACK

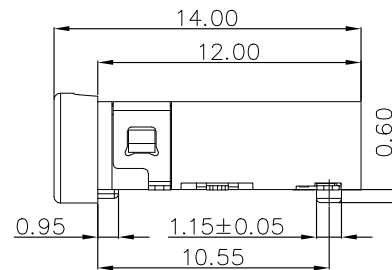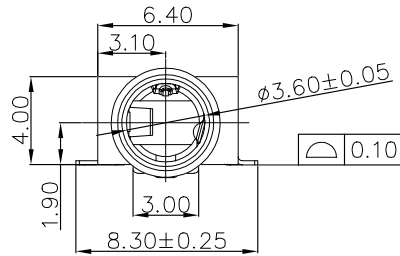

SCHEMATIC

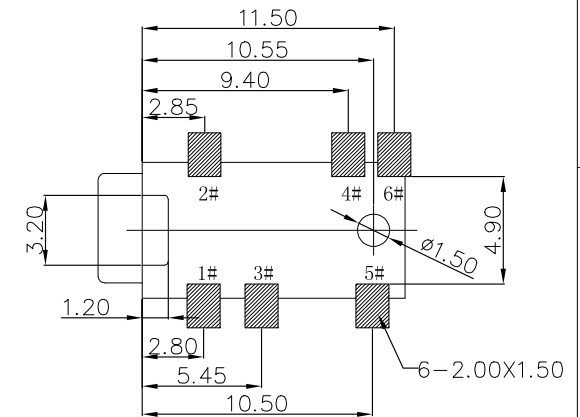

P.C.B. LAYOUT
TOP VIEW

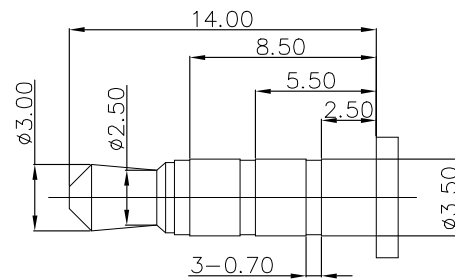

(φ3.50mm 4 POLE PLUG DETAIL DRAWING)

7	TERMINAL 6#	1	C5191 T=0.20mm	
6	TERMINAL 5#	1	C5191 T=0.20mm	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
5	TERMINAL 4#	1	C5191 T=0.20mm	
4	TERMINAL 3#	1	C5191 T=0.20mm	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
3	TERMINAL 2#	1	C5191 T=0.20mm	
2	TERMINAL 1#	1	C5191 T=0.20mm	THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.
1	HOUSING	1	PA9T COLOR BLACK	
ITEM	NAME	Q'TY	MATERIAL	DESCRIPTION

DIM	TOL	DIM	TOL
x.	±0.35	x.	±2'
.x	±0.30		
.xx	±0.25		



DEREN

SHENZHEN DEREN ELECTRONIC CO., LTD

DRAW NO.

REV. 1

CUSTOMER DRAWING

DATE

DESIGN: Alex_Z 2019.10.21

CHECK:

APPROVAL:

TITLE: AUDIO JACK 6P 1.90OH 4.0H SMT CONN

P/N: SEE TABLE

SHEET: 1/2

SCALE: 1:1 UNIT: mm